


## SINK INSTALLATION

1. Cut hole  $1/2"$  to  $5/8"$  smaller than overall length and width of sink.
2. Center sink in hole on countertop.
3. Slip L-bracket over studs and lightly tighten wing nut.
4. Make sure L-bracket makes contact with the sink and not the stud plate (see "A" on illustration below).
5. Working in a clockwise manner, firmly tighten all wing nuts. **NOTE: Do not overtighten wing nuts, as this can cause the stud to break loose from the sink.**
6. 100% Silicone caulk is recommended for sealing kitchen and utility sinks to the counter top.

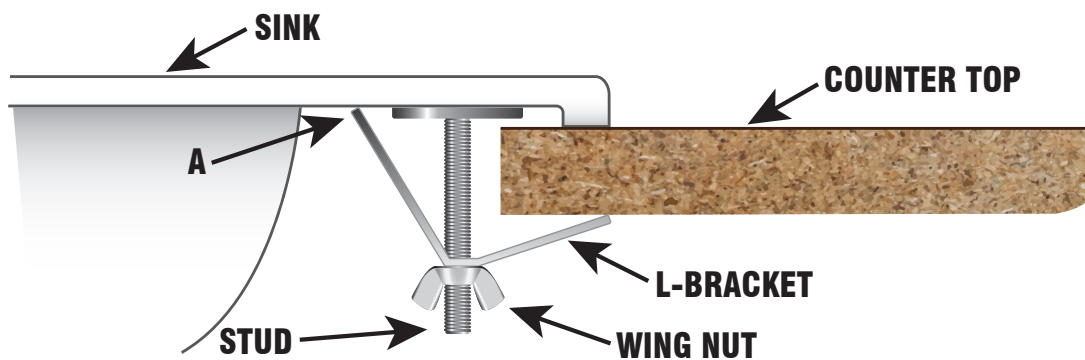

### CARE INSTRUCTIONS

To repair light scratches to the sink, please follow the instructions below.

**NOTE: IF SCRATCHES ARE LESS THAN  $1/64"$  DEEP, SKIP TO STEP 2. FOR MINOR BLEMISHES, SKIP TO STEP 3.**

1. Wet sand damaged surface, starting with 600 grit sandpaper, in a circular motion. Change to 1000-grit sandpaper and repeat.
2. Wet sand damaged surface starting with 1200 and 1500 grit sandpaper in a circular motion.
3. Buff the damaged surface with a clean cloth and some plastic polish until scratches are gone. *GS27 Classics® Titanium® Scratch Remover* or *Novus® NO. 2 Plastic Polish* is recommended.
4. Repeat if necessary.



**WARNING: Dry cleaning agents and solvents will damage sink. For routine cleaning please use standard dish soap and water.**

**Do not allow burning cigarettes to touch sink surface.**

**For additional questions, please contact DUO Form Customer Service at (269) 663-8525.**

**DUO DUO FORM**  
PLASTICS

69836 Kraus Road | Edwardsburg, MI 49112 | [www.duoformplastics.com](http://www.duoformplastics.com)

Electronic copies of all instruction sheets can be found at [www.duoformplastics.com](http://www.duoformplastics.com). These instructions supersede all prior instruction sheets. Failure to follow instructions may result in voided warranty. DUO Form Plastics reserves the right to make changes and to discontinue products without notice or obligation.

**Authorizing Changes:** A DUO Form representative must authorize any variance from the above recommended instructions, in writing. Please contact Customer Service to request changes to the above instructions.