

SKYLIGHT INTERIOR GARNISH INSTALLATION

INSTALLATION

Each skylight garnish has a recommended roof hole opening depending on size. This opening should have a perimeter of 1/4" greater than the inside perimeter of the garnish itself. Refer to Figure 1 below.

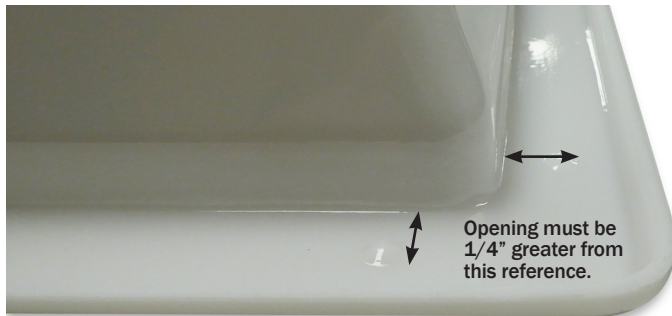


Fig. 1



1. Center the garnish over the skylight opening.
2. Using the screw embosses in the skylight flange, fasten in place using a self-tapping #8 x 1" pan head screw, or pre-drill, making sure to keep screws perpendicular to the garnish.
NOTE: Screws should be torqued down tight enough to hold the garnish in place. DO NOT over tighten screws as this will cause stress at the screw point and possibly result in cracks forming.

COMPATIBLE CLEANERS FOR SKYLIGHT GARNISHES

The following commercial cleaning products are readily available and are quite safe when properly used: *DUO Plastic Cleaner for Bath & Kitchen* (available online at www.duoformplastics.com/store/), *Fantastik*®, *Ivory*® soap (liquid or flake) in a water solution, *Scrubbing Bubbles*®, *Pine Sol*®, *Formula 409*®, *Windex*®, *Simple Green*®, and *Spic and Span*®. **NOTE: Cleaning products must be bleach and ammonia free.**

HEAVY-DUTY CLEANING:

The following commercial cleaners are recommended: *OOPS!*®, *Soft Scrub*®, *Turtle Wax*®, *Turtle Wax*® Bug & Tar and Tree Sap Remover

AFTER CLEANING, ALL SURFACES SHOULD BE RINSED WITH CLEAN WATER.



CAUTION: Do not use any cleaners containing citrus oils as this could cause severe damage to your unit. Cleaners containing acetone or any products that contain bleach, ammonia, esters, ethers, ketones, aromatic and chlorinated hydrocarbons, and isopropanol in concentrations greater than 25% should also be avoided as use of any of these materials could damage the surface of your enclosure. Mineral spirits should also be avoided.

For additional questions, please contact DUO Form Customer Service at (269) 663-8525.



69836 Kraus Road | Edwardsburg, MI 49112 | www.duoformplastics.com

Electronic copies of all instruction sheets can be found at www.duoformplastics.com. These instructions supersede all prior instruction sheets. Failure to follow instructions may result in voided warranty. DUO Form Plastics reserves the right to make changes and to discontinue products without notice or obligation.

Authorizing Changes: A DUO Form representative must authorize any variance from the above recommended instructions, in writing. Please contact Customer Service to request changes to the above instructions.